




EXTREME ENVIRONMENT EQUIPMENT TECHNOLOGY

DATA SHEET RACKMOUNTED DIVER CCTV UNIT'S

THREE DIVER UNIT



TWO DIVER UNIT

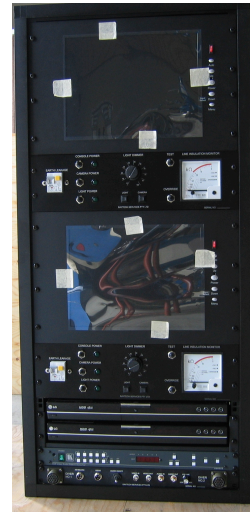

SPECIFICATIONS:

- 15" Daylight Viewable Colour LCD monitor (menu driven)
- 2 x Hard Drive Recorder Solid state 1 tetra bit (With remote control)
- Accepts twisted pair video (balanced) / coaxial video (unbalanced)
- 4 x 4 Video switcher and Distribution unit
- Standard Earth Leakage Circuit breaker and AC and DC circuit breakers
- LIM Line Insulation Monitor as standard
- LED lighting control (Dimmer able) 1.5A at 36Vdc
- AC supply 90Vac to 270Vac power inlet socket (mil-spec)
- Camera Focus and zoom control Via auxiliary socket
- Compatible with Raytech LANC/Windows control software.
- Control cable outlet socket (mil-spec)
- USB inlet & outlet sockets
- Video and Audio inlet & outlet sockets
- Volume control for audio amplifier
- USB A connection for downloading to PC
- USB B connection for extra storage on to Thumb drive
- AC and DC power cables.
- Overlay with Text insertion Time, day, and date stamp with half size splash proof keyboard.
- RS232 inlet for survey input to video overlay